

**Instruction:** Hand in your work with name and code by hand before the class is started. DO NOT copy homework from your classmates or lend it to others. Anyone who violates this regulation will be given -10 for the homework.

1. For the electric circuit shown in Fig. 1, **find** the following:

- The time-domain equation relating  $i(t)$  and  $v_1(t)$ . (2 points)
- The time-domain equation relating  $i(t)$  and  $v_2(t)$ . (2 points)
- Assuming all initial conditions are zero, the transfer function  $V_2(s)/V_1(s)$  and the damping ratio  $\zeta$  and undamped natural frequency  $\omega_n$  of the system. (3 points)
- The values of  $R$  that will result in  $v_2(t)$  having an overshoot of no more than 25%, assuming  $v_1(t)$  is a unit step,  $L = 10$  mH, and  $C = 4\mu$  F. (3 points)

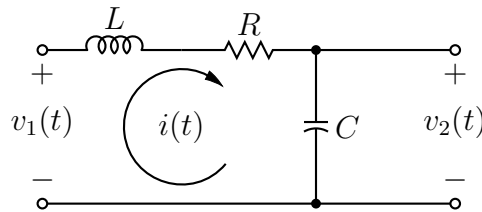


Figure 1: Problem 1.

2. The equations of motion for the DC motor is given as

$$J_m \ddot{\theta}_m + \left( b + \frac{K_t K_e}{R_a} \right) \dot{\theta}_m = \frac{K_t}{R_a} v_a,$$

where  $J_m = 0.01$  kg·m<sup>2</sup>,  $b = 0.001$  N·m·sec,  $K_e = 0.02$  V·sec,  $K_t = 0.02$  N·m/A,  $R_a = 10$  Ω.

- Find the transfer function between the applied voltage  $v_a$  and the motor speed  $\dot{\theta}_m$ . (2 points)
- What is the steady-state speed of the motor after a voltage  $v_a = 10$  V has been applied? (1 point)
- Find the transfer function between the applied voltage  $v_a$  and the shaft angle  $\theta_m$  (2 points)

- (d) Suppose feedback is added to the system in part (c) so that it becomes a position servo device such that the applied voltage is given by

$$v_a = K (\theta_r - \theta_m),$$

where  $K$  is the feedback gain. Find the transfer function between  $\theta_r$  and  $\theta_m$ . (3 points) (**Hint:** Draw your block diagram of the closed-loop system first.)

- (e) What is the maximum value of  $K$  that can be used if an overshoot  $M_p < 20\%$  is desired? (3 points)
- (f) What values of  $K$  will provide a rise time of less than 4 sec? (Ignore the  $M_p$  constraint.) (2 points)
- (g) Prove your designs in parts (e) and (f) by using SciLab. (Show your codes and plots) (3 points)